

**PH780DBR
780nm Series**


High-Power Single-Frequency Laser Diode

Technology

- DBR Single-Frequency Laser Chip
- AlGaAs QW Active Layer
- Epi designed for high reliability

Features

- Available in several package styles
- Pulsed operation for spectral stability at short pulse lengths
- High power for CW applications
- High Slope Efficiency

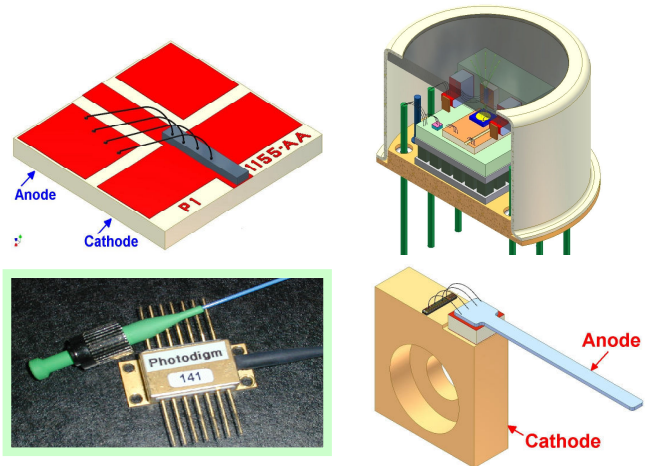

Description

The PH780DBR Series of high-power edge-emitting lasers are based on Photodigm’s advanced single-frequency laser technology. It provides a diffraction limited, single lateral and longitudinal mode beam. Facets are passivated for high-power reliability. Applications include spectroscopy for rubidium-based quantum encryption, chronometry, and magnetometers.

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature	T _{STG}	°C	0	80
Operating Temperature	T _{OP}	°C	5.0	70
CW Laser Forward Current, T=25°C **	I _F	mA	-	150
Pulsed Laser Forward Current, T=25°C, PW=300 ns, DC=10%	I _F	A	-	0.3
Laser Reverse Voltage	V _R	V	-	0.0
Photodiode Forward Current <u>1/2/</u>	I _P	mA	-	5.0
Photodiode Reverse Voltage <u>1/2/</u>	V _R	V	-	20.0
Photodiode Dark Current, V _R =10V, LD I _F =0, <u>1/2/</u>	I _D	nA	-	50
TEC Current <u>1/2/</u>	I _{TEC}	A	-2.0	2.0
TEC Voltage <u>1/2/</u>	V _{TEC}	V	-6.0	6.0
Thermistor Current <u>1/2/</u>	I _{THRM}	mA	-	1.0
Thermistor Voltage <u>1/2/</u>	V _{THRM}	V	-	10
External Back Reflection	-	dB	-	-14
Lead Soldering Temperature, 10 sec. Max. <u>1/2/</u>	-	°C	-	260
Fiber Pull Force <u>1/</u>	-	N	-	5.0
Fiber Bend Radius <u>1/</u>	-	mm	-	35

1/ Butterfly package 2/ TO8 package

** unless otherwise noted

CW Characteristics at T_c = 25°C unless otherwise specified

Parameter	Symbol	Unit	Min	Typ	Max
Center Wavelength @ 150mA	λ_c	nm	778	780	782
Optical Output Power @ 150mA	P _o	mW	See Power Options Call-out		
Slope Efficiency, 1/	η_d	W/A	0.3	0.36	
Slope Efficiency	η_d	W/A	0.6	0.75	-
Threshold Current	I _{th}	mA	-	50	70
Laser Series Resistance	R _S	Ω	-	2.0	2.5
Laser Forward Voltage @ 150mA	V _F	V	-	2.0	2.5
Thermistor Resistance @ 25°C, 1/2/	R _T	K Ω	-	10	-
Photodiode Dark Current, V _R =10V, LD I _F =0, 1/2/	I _D	nA	-	-	50
Laser Line Width @ 150mA	$\Delta\nu$	MHz	-	0.7	1.0
Polarization Extinction Ratio, 1/	PER	dB	-16	-19	-
Beam Divergence @ FWHM	$\theta_{ } \times \theta_{\perp}$	°	-	6 X 26	8 X 28
Side Mode Suppression Ratio	SMSR	dB	-30	-	-
Laser Polarization				TE	
Mode Structure			Fundamental Mode		

1/ Butterfly package 2/ TO-8 package

Handling Precautions

These devices are sensitive to ESD. When handling the module, grounded work area and wrist strap must be used. Always store in an antistatic container with all leads shorted together.

How To Order

Part number example: PH780DBR080CM. Assign optical power from those available shown in Photodigm's Product Capabilities Brochure. Use a three-digit format for all power entries. Call factory for special frequency selection and certification to certain atomic absorption lines.


PH780DBR 

Minimum Power (mW)

040	100
060	125
080	150

Package Type

- CS** Chip on Submount
- CM** 'C' Mount
- BF** Butterfly
- T8** TO-8

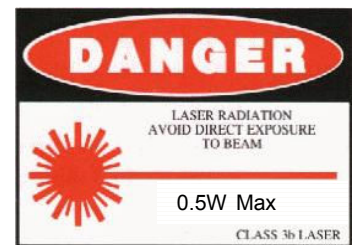

Photodigm, Inc. reserves the right to make changes in design, specifications and other information at any time, and without prior notice. The information contained within the product bulletin is believed to be accurate. However, no responsibility is assumed for possible inaccuracy or omission. Any information contained herein shall legally bind Photodigm, Inc. only if it is specifically incorporated in the terms and conditions of a sales agreement.